


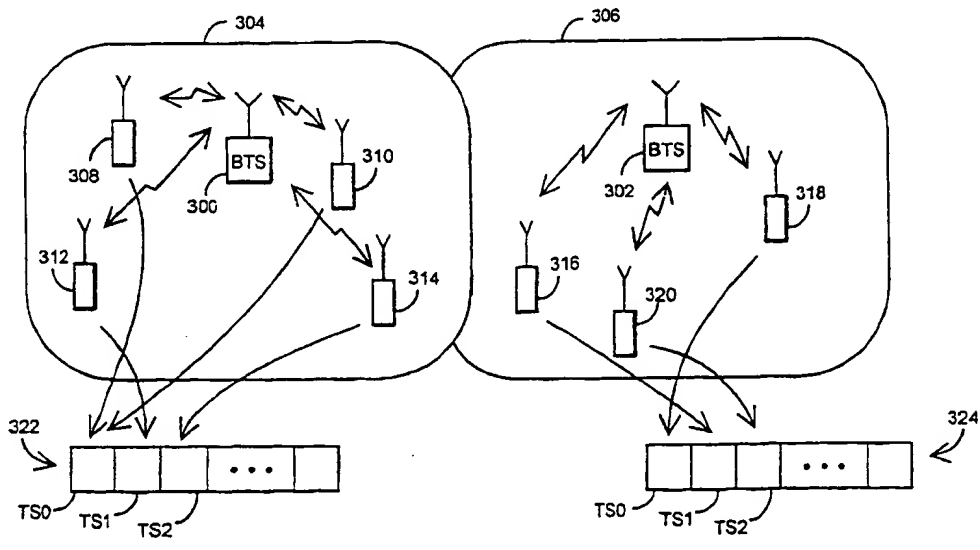

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification <sup>6</sup> : H04Q 7/26, H04J 15/00</p>	<p>A2</p>	<p>(11) International Publication Number: WO 98/17077 (43) International Publication Date: 23 April 1998 (23.04.98)</p>
<p>(21) International Application Number: PCT/FI97/00625 (22) International Filing Date: 14 October 1997 (14.10.97) (30) Priority Data: 964138 15 October 1996 (15.10.96) FI (71) Applicant (for all designated States except US): NOKIA TELECOMMUNICATIONS OY [FI/FI]; Keilalahdentie 4, FIN-02150 Espoo (FI). (72) Inventors; and (75) Inventors/Applicants (for US only): TOSKALA, Antti [FI/FI]; Itämerenkatu 8 A 2, FIN-00180 Helsinki (FI). HOLMA, Harri [FI/FI]; Itävuolenkuja 1 B 32, FIN-02100 Espoo (FI). PIIRHONEN, Riku [FI/FI]; Gyldenintie 10 E 85, FIN-00200 Helsinki (FI). (74) Agent: PATENTTITOIMISTO TEKNOPOLOIS KOLSTER OY; c/o Kolster Oy AB, Iso Roobertinkatu 23, P.O. Box 148, FIN-00121 Helsinki (FI).</p>		<p>(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).</p> <p>Published In English translation (filed in Finnish). Without international search report and to be republished upon receipt of that report.</p>
<p>(54) Title: CHANNEL ALLOCATION METHOD AND RADIO SYSTEM USING A COMBINATION OF TDMA AND CDMA</p>  <p>(57) Abstract</p> <p>The invention relates to a radio system and a channel allocation method in a radio system comprising at least one base station (300) communicating with terminals (308 to 314) within its coverage area (304), and in which method air interface resources are allocated to different terminals with a combined time and code multiple access method in such a way that the signal of one or more terminals is transmitted in each time slot (TS0 to TS6). In order for air interface resources to be efficiently allocated to different connections, in the method of the invention terminal signals (308 to 314) are grouped into different time slots on the basis of the connection characteristics of each terminal.</p>		

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AI	Antigua and Barbuda	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BD	Bangladesh	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BE	Belgium	GR	Greece	ML	Mali	TR	Turkey
BF	Burkina Faso	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MX	Mexico	UG	Uganda
BY	Belarus	IS	Iceland	NE	Niger	US	United States of America
CA	Canada	IT	Italy	NL	Netherlands	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NO	Norway	VN	Viet Nam
CG	Congo	KE	Kenya	NZ	New Zealand	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	PL	Poland	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PT	Portugal		
CM	Cameroon	KR	Republic of Korea	RO	Romania		
CN	China	KZ	Kazakhstan	RU	Russian Federation		
CU	Cuba	LC	Saint Lucia	SD	Sudan		
CZ	Czech Republic	LI	Liechtenstein	SE	Sweden		
DE	Germany	LK	Sri Lanka	SG	Singapore		
DK	Denmark	LR	Liberia				
EE	Estonia						

## CHANNEL ALLOCATION METHOD AND RADIO SYSTEM USING A COMBINATION OF TDMA AND CDMA

The present invention relates to a channel allocation method in a radio system comprising at least one base station communicating with terminals within its coverage area, some of the terminals using discontinuous transmission, and in which method air interface resources are allocated to different terminals with a combined time and code division multiple access method in such a way that a signal of one or more terminals is transmitted in each time slot.

## 10 DESCRIPTION OF THE PRIOR ART

One of the most essential problems in planning and implementing radio systems is the efficient use of frequency. As the volume of radio traffic is continuously on the increase, this problem has become more and more important. The more efficiently a system can utilize a given frequency band, the greater is the potential number of users of the system. When new radio systems are developed, the multiple access methods of air interface are a central field of research.

Thus the aim of multiple access methods is to use frequency, in other words air interface resources, as efficiently as possible. As the number of users increases, the most important factor that restricts the capacity is co-channel interference, and as a consequence the way how users are grouped into different channels becomes crucial to maximizing the capacity. Specifically in mobile communication systems the problem is on one hand the mobility of users, which gives rise to geographically varying needs of capacity, and on the other hand the environmental differences in view of the propagation of radio waves, and the multipath propagation, which cause slow and fast changes in signal strength. Thus a multiple access method must be applicable under the influence of random factors in a way which enables the division of channels between users advantageously in view of the whole system.

30 In frequency division multiple access (FDMA), users are separated from one another by frequency; a separate frequency band is allocated to the data signal of each user. In time division multiple access (TDMA) the frequency band is divided into successive time slots, and the data signal of each user is transmitted in a separate, repetitive time slot. A plurality of frequency bands like this can be in use, in which case the method is called a

combined FDMA/TDMA. In a conventional TDMA system, when a transmitter is powerful, the same time slot cannot be used in adjacent cells due to co-channel interference, even though the aim is to limit the average transmission power by using discontinuous transmission. The problem has been solved by  
5 adopting a reuse pattern according to which a common frequency is not used in adjacent cells. However, this is inefficient as to the use of frequencies. Furthermore, the decrease in the average interference level caused by discontinuous transmission cannot be fully utilized to reduce the reuse configuration, since the reuse configuration is determined to a great extent by  
10 the peak value of the co-channel interference caused by one user.

Code division multiple access (CDMA) is a multiple access method based on a spread-spectrum technique. In conventional CDMA, a narrowband data signal of the user is modulated by a spreading code with a broader bandwidth than that of the data signal onto a relatively broad band.  
15 The spreading code comprises a plurality of bits. The bit speed of the spreading code is much higher than that of the data signal, and in distinction from the data bits and data symbols the spreading code bits are called chips. Each data symbol of the user is multiplied by all spreading code chips. Each user of the same cell has a separate spreading code. Several users transmit  
20 simultaneously on the same frequency band, and data signals are distinguished from one another at receivers on the basis of the spreading code. In CDMA systems the power adjustment of transmitters is assumed to function optimally in disturbance control. Users operating on different power levels are on the same frequency band and the function of power adjustment  
25 is critical to the system. Further, it is difficult to use great power differences in downlink transmission.

The method of the invention can be applied to radio systems specifically those employing a combined TDMA/CDMA method. Hence the air interface resources are divided in such a way that a channel consists of  
30 successive time slots transmitting the signals of one or more terminals, which signals are multiplied each by a separate spreading code, which may be one or more. FDMA can also be included in the method, in which case several different frequencies, each employing the combined TDMA/CDMA method, are in use. The combined TDMA/CDMA method is described in greater detail in  
35 Baier P.W, *A Critical Review of CDMA, Proceedings of VTC96*, pp. 6-10.

## BRIEF DESCRIPTION OF THE INVENTION

The aim of the present invention is to implement a method for multiple access and channel allocation by which the effects of random factors can be averaged efficiently, and which is easily adaptable in different  
5 operating and environmental circumstances.

This is achieved with a method set forth in the preamble, which is characterized in that terminal signals are grouped into different time slots on the basis of the connection characteristics of each terminal in such a way that signals of terminals employing discontinuous transmission are grouped into  
10 the same time slots and transmissions of terminals employing continuous transmission into time slots of their own.

The invention also relates to a channel allocation method in a radio system comprising at least one base station communicating with terminals within its coverage area, and which system comprises both circuit switched  
15 services and packet switched services, and in which method air interface resources are allocated to different terminals with a combined time and code multiple access method in such a way that the signal of one or more terminals is transmitted in each time slot. The channel allocation method according to the invention is characterized in that the terminal signals are grouped into  
20 different time slots on the basis of the connection characteristics of each terminal in such a way that the signals of terminals employing circuit switched services are grouped into the same time slots, and the transmissions of terminals employing packet switched services into time slots of their own.

The invention further relates to a radio system comprising at least  
25 one base station communicating with terminals within its coverage area, and employing a combined time and code division multiple access method in such a way that the signals of one or more terminals are transmitted in each time slot, and in which system some of the terminals are fixed and others mobile. The radio system according to the invention is characterized in that the  
30 terminal signals are grouped into different time slots on the basis of the connection characteristics of each terminal in such a way that the signals of fixed terminals are grouped into the same time slots and the transmissions of mobile terminals into time slots of their own.

Several advantages are achieved with the method of the invention.  
35 By grouping the terminals into different time slots in accordance with their power levels, co-channel interference can be decreased. As a consequence

of this the reuse configuration can be reduced, which allows easier cellular planning and more efficient utilization of the frequency spectrum. The reduction in power level changes within one time slot also enables an improvement in the reliability of interference level measurements of the  
5 channel.

The method of the invention can thus be applied to TDMA/CDMA systems, and to systems which, in addition to the aforementioned, also comprise FDMA, that is to say a plurality of frequency channels. Hence in time slot allocation the availability of an adjacent channel can be considered  
10 depending on whether low or high power users are allocated to the time slot. Furthermore, the invention can be applied to both FDD (Frequency Division Duplex) and TDD (Time Division Duplex) methods.

#### DESCRIPTION OF THE DRAWINGS

In the following the invention will be described in greater detail with  
15 reference to the examples in accordance with the attached drawings, in which

Figure 1 illustrates an example of a frame structure in the TDMA/CDMA method, and

Figures 2 and 3 illustrate examples of allocating terminal signals to different time slots.

#### 20 DESCRIPTION OF THE PREFERRED EMBODIMENTS

The solution according to the invention can thus be implemented in radio systems employing a combined TDMA/CDMA method. In accordance with the multiple access method, signals are allocated in the time domain to time slots which are typically grouped into frames of predetermined  
25 dimensions. To provide service of good quality, each user must be given a time slot in which the actual signal-to-interference ratio is adequate to ensure the quality of the desired service. Figure 1 illustrates an example of a frame structure in a TDMA/CDMA method. In the example of Figure 1 the frame comprises eight time slots TS0, TS1, to TS7. In accordance with the principles  
30 of code division, signals of a plurality of terminals can be transmitted in each frame, each signal being coded with a spreading code that makes the distinction between signals possible at the receiving end. Co-channel interference is thus formed as a sum of several signals differentiated by codes. In Figure 1 the first time slot TS0 of the frame comprises the signals 100 to  
35 104 of three terminals. Correspondingly, the second time slot TS1 comprises

the signal 106 of one terminal and the third time slot TS2 two signals 108 and 110.

In the solution of the invention, transmissions of different terminals are grouped into different time slots on the basis of the connection characteristics of each terminal. In accordance with a preferred embodiment of the invention, terminal transmissions are grouped into power categories on the basis of the transmission power used in the downlink direction, and transmissions of terminals in each power category are allocated to the same time slots. In this solution the dynamics of power adjustment within a time slot remains small, and on the other hand, a base station may use power levels that vary distinctly in different time slots. This is illustrated in Figure 2 showing a base station 200 with a plurality of terminals 202 to 208 within its coverage area. Connections 212, 214 of terminals 204, 206 located close to the base station may use lower power levels, and in accordance with the invention these are allocated to the same time slot, in the example of Figure 2 to the time slot TS2. Accordingly, connections 210, 216 of terminals 202 and 208 located far from the base station, which connections have to use higher power levels than the above connections owing to greater path loss, are grouped to use the same time slot, in Figure 2 the time slot TS0.

Transmissions are advantageously allocated to time slots in such a way that the difference in power levels of successive time slots is as small as possible, in order to avoid great unnecessary decreases and increases in power that cause disturbances.

In accordance with another preferred embodiment of the invention, the transmissions of terminals are grouped into different time slots on the basis of the transmission power level of each terminal. The maximum number of users in each time slot is limited on the basis of user power levels within one or more adjacent cells. In case the power levels are low, the number of users may be limited cell-specifically. In case the power levels used are high, in which case the risk of co-channel interference in the area of a neighbouring cell increases, the limitation of the number of users is effected between a plurality of adjacent cells. In that case a kind of timeslot-specific reuse configuration is concerned.

This embodiment is illustrated in Figure 3 showing two base stations 300 and 302 with a plurality of terminals in their covering areas; terminals 308 to 314 in the coverage area 304 of the base station 300, and

terminals 316 to 320 in the coverage area 306 of the base station 302. It is assumed that both base stations use the same frequency band. The figure illustrates the frame structure 322, 324 used by each base station. The base station 300 allocates the terminals 308, 310, close to the base station and thus using low transmission power, to the time slot TS0. Similarly, the base station 302 allocates the nearby terminal 318 using low transmission power to the same time slot TS0. Terminals 312 and 314, located farther away using high transmission power, to the time slots TS1 and TS2. Similarly, the base station 302 allocates the terminals 316 and 320 located farther away to the time slots TS1 and TS2. Terminals in adjacent cells and using low transmission power can all be allocated to the same time slot, since the transmissions in adjacent cells do not interfere with each other owing to their low transmission power. The number per time slot of terminals using higher transmission power must be limited in each cell in order for the co-channel interference not to increase excessively.

By grouping the terminals into different time slots on the basis of their power levels the co-channel interference can thus be reduced. Without grouping, all codes on the same channel would have to be sent within limited power dynamics. In that case a user requiring the highest power would determine the entire downlink transmission power to all codes in a dynamic range. As a consequence, the codes at the disposal of users close to the base station would also cause unnecessary co-channel interference in adjacent cells.

The invention can also preferably be applied to systems where some terminals use discontinuous transmission which aims at decreasing co-channel interference in radio systems. Discontinuous transmission relates to a method in which a transmitter sends a signal only when there is information to be transmitted, and at other times a signal is not sent. For example, when transmitting speech the transmitter is silenced when the user is not speaking. In TDMA systems the advantage of discontinuous transmission can not necessarily be benefited to the full, because when the transmission is on, the interference level it produces is nevertheless too high. In accordance with a preferred embodiment of the invention, transmissions of terminals using discontinuous transmission are grouped into the same time slots, and transmissions of terminals using continuous transmission into time slots of their own. Hence the advantage of discontinuous transmission can be utilized



better than before. When the same time slot is allocated to several spreading code users, the interference level caused by users decreases more steadily owing to discontinuous transmission, since when the number of users increases, the ratio of interference caused by one user to the total interference  
5 decreases.

The invention can advantageously be applied also to systems having both circuit switched and packet switched services. Like in discontinuous transmission, the advantage to be gained with packet transmissions can be utilized better in the solution of the invention, in which  
10 signals of terminals employing circuit switched services are grouped into the same time slots and transmissions of terminals employing packet switched services into time slots of their own.

When the grouping into different time slots is effected, the minimization of mutual interference of different cell levels of hierarchical cells  
15 can also be taken into account. Thus micro cell users can be allocated to the same time slot, as can macro and pico cell users.

The invention can also be applied in such a way that when grouping users into different time slots, the channel coding used is considered when limiting the maximum number of users transmitting in each time slot. When  
20 using more efficient channel coding, more transmissions can be allowed in the same time slot than when using less efficient channel coding.

When grouping users into different time slots, the maximum number of users in each time slot can be increased temporarily, for example for signalling, since it can be assumed that error correction algorithms used on  
25 connections will manage temporary disturbances caused by a temporary increase in the number of users.

The invention can also preferably be applied to systems offering both mobile subscriber connections and fixed radio subscriber connections. Fixed radio subscriber connections are connections in which a terminal  
30 employing radio link is located in a fixed position. In accordance with a preferred embodiment of the invention, transmissions of fixed terminals are grouped into the same time slots and transmissions of mobile terminals into time slots of their own. Within time slots comprising different terminal types, groupings can naturally be effected according to other embodiments of the  
35 invention.

Even though the invention has been described in the above with reference to examples in accordance with the attached drawings, it is obvious that the invention is not restricted to them but can be modified in a variety of ways within the scope of the inventive idea disclosed in the appended claims.

## CLAIMS

1. A channel allocation method in a radio system comprising at least one base station (300) communicating with terminals (308 to 314) within its coverage area (304), some of the terminals (308 to 314) using discontinuous transmission, and in which method air interface resources are allocated to different terminals with a combined time and code multiple access method in such a way that a signal of one or more terminals is transmitted in each time slot (TS0 to TS6), **characterized** in that the terminal signals (308 to 314) are grouped into different time slots on the basis of connection characteristics of each terminal in such a way that terminal signals employing discontinuous transmission are grouped into the same time slots and transmissions of signals employing continuous transmission into time slots of their own.

2. A channel allocation method in a radio system comprising at least one base station (300) communicating with terminals (308 to 314) within its coverage area (304), and which system comprises both circuit switched services and packet switched services, and in which method air interface resources are allocated to different terminals with a combined time and code multiple access method in such a way that a signal of one or more terminals is transmitted in each time slot (TS0 to TS6), **characterized** in that the terminal signals (308 to 314) are grouped into different time slots on the basis of connection characteristics of each terminal in such a way that terminal signals employing circuit switched services are grouped into the same time slots and transmissions of signals employing packet switched services into time slots of their own.

3. A method as claimed in claim 1, **characterized** in that signals of terminals (308 to 314) are grouped into power categories on the basis of transmission power used in downlink direction, and that transmissions of terminals in each power category are allocated to the same time slots.

4. A method as claimed in claim 1, **characterized** in that signals of terminals (308 to 314) are grouped into different time slots on the basis of the transmission power of each terminal.

5. A method as claimed in claim 4, **characterized** in that signals of terminals transmitting with an equal power are grouped into the same time slots.

6. A method as claimed in claim 1 or 4, **characterized** in that signals of terminals (308 to 314) are grouped into different time slots basestation-specifically.

7. A method as claimed in claim 1 or 4, **characterized** in  
5 that when grouping signals of terminals (308 to 320), connection characteristics of terminals located within the area of a plurality of base stations (300, 302) are considered.

8. A method as claimed in claim 1 or 4, **characterized** in that when grouping signals of terminals (308 to 314) into different time slots, a  
10 channel coding used is considered.

9. A method as claimed in claim 1 or 4, **characterized** in that when grouping signals of terminals (308 to 314) into different time slots, power differences between successive time slots are minimized.

10. A method as claimed in claim 1 or 4, **characterized** in  
15 that when allocating air interface resources, a frequency multiple access method is also employed, and that when grouping signals of terminals (308 to 314) into different time slots, the availability of a neighbouring channel is considered depending on whether low or high power users are allocated to a time slot.

20 11. A radio system comprising at least one base station (300) communicating with terminals (308 to 314) within its coverage area (304), and in which a combined time and code multiple access method is used in such a way that signals of one ore more terminals are transmitted in each time slot (TS0 to TS6), and in which system some terminals (308 to 314) are fixed and  
25 others mobile, **characterized** in that signals of terminals (308 to 314) are grouped into different time slots on the basis of connection characteristics of each terminal in such a way that signals of fixed terminals are grouped into the same time slots and transmissions of mobile terminals into time slots of their own.

30 12. A system as claimed in claim 11, **characterized** in that signals of terminals (308 to 314) are grouped into power categories on the basis of transmission power used in downlink direction, and that transmissions of each power category are allocated to the same time slots.

35 13. A system as claimed in claim 11, **characterized** in that when grouping signals of terminals (308 to 320), connection characteristics of

terminals located within the area of a plurality of base stations (300, 302) are considered.

1/2

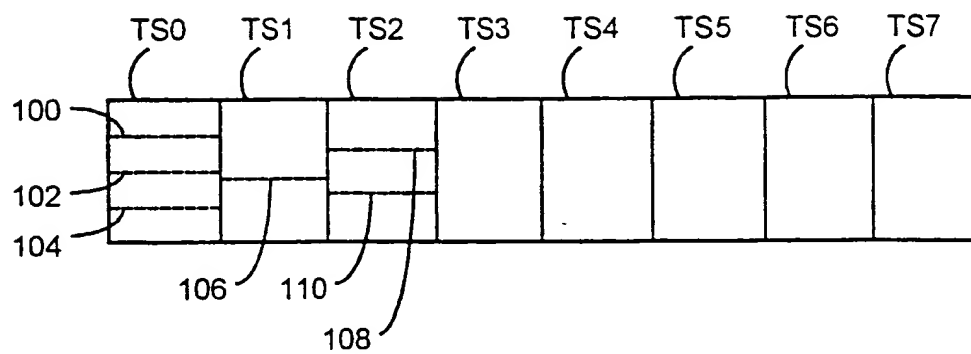


Fig. 1

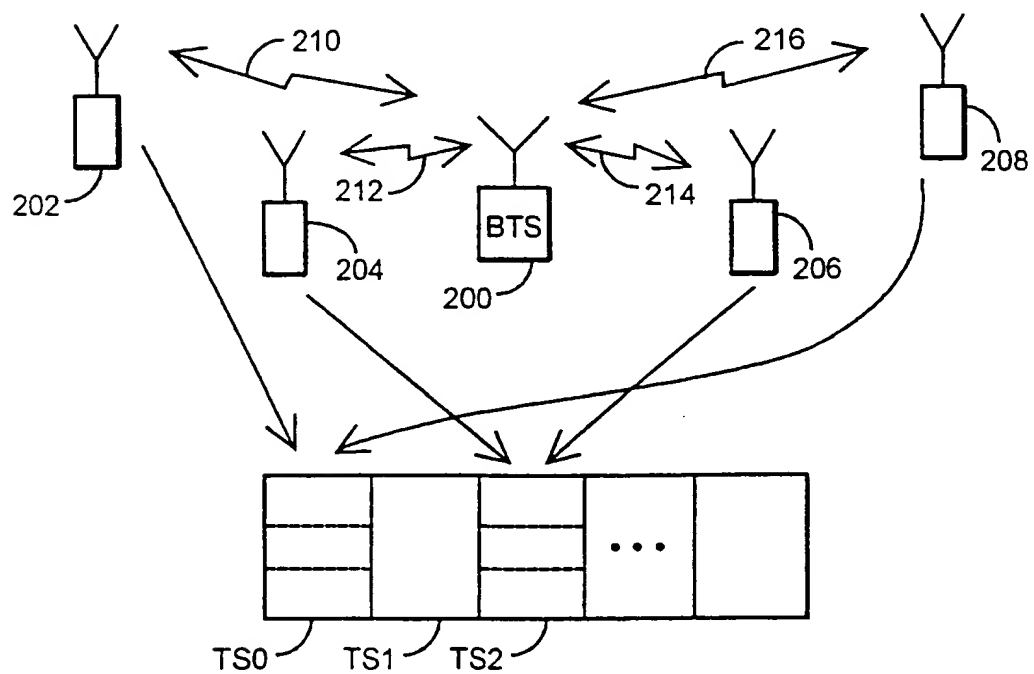


Fig. 2

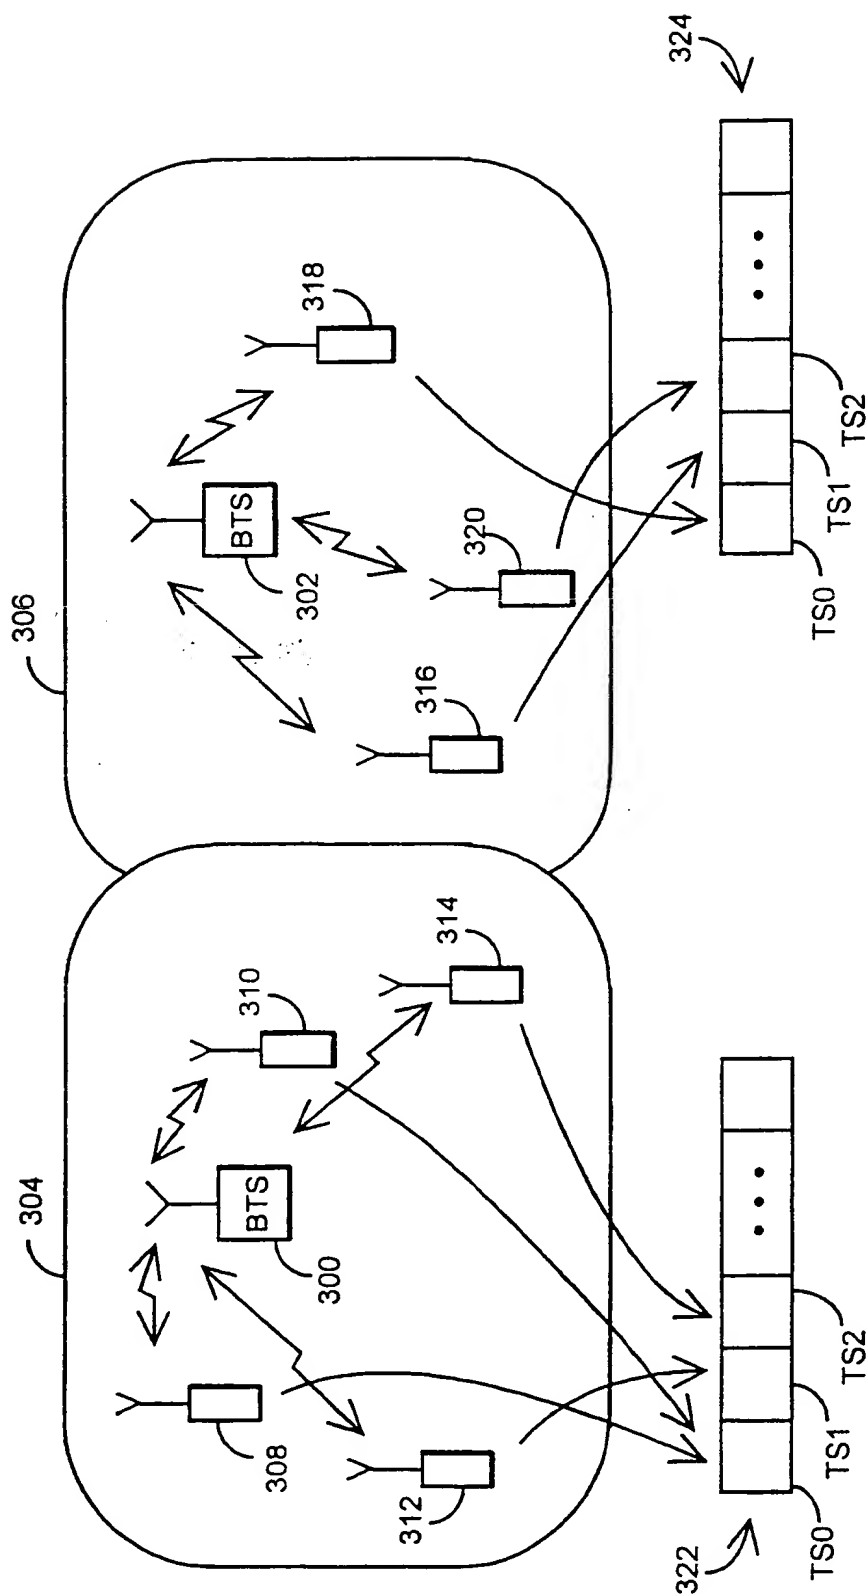


Fig. 3

**THIS PAGE BLANK (USPTO)**



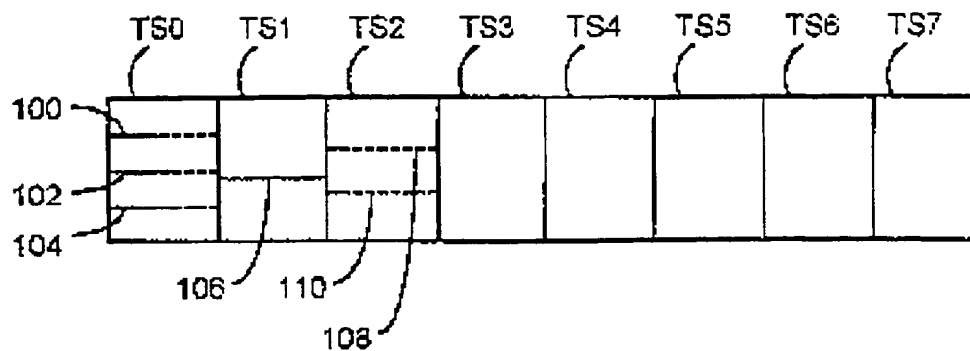


Fig. 1

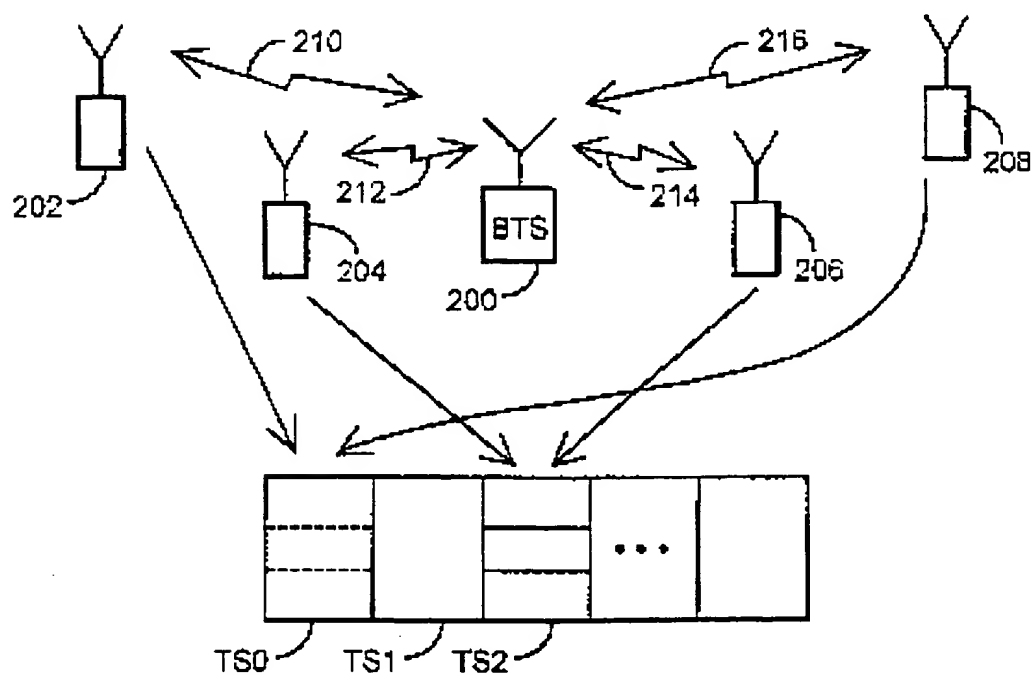


Fig. 2

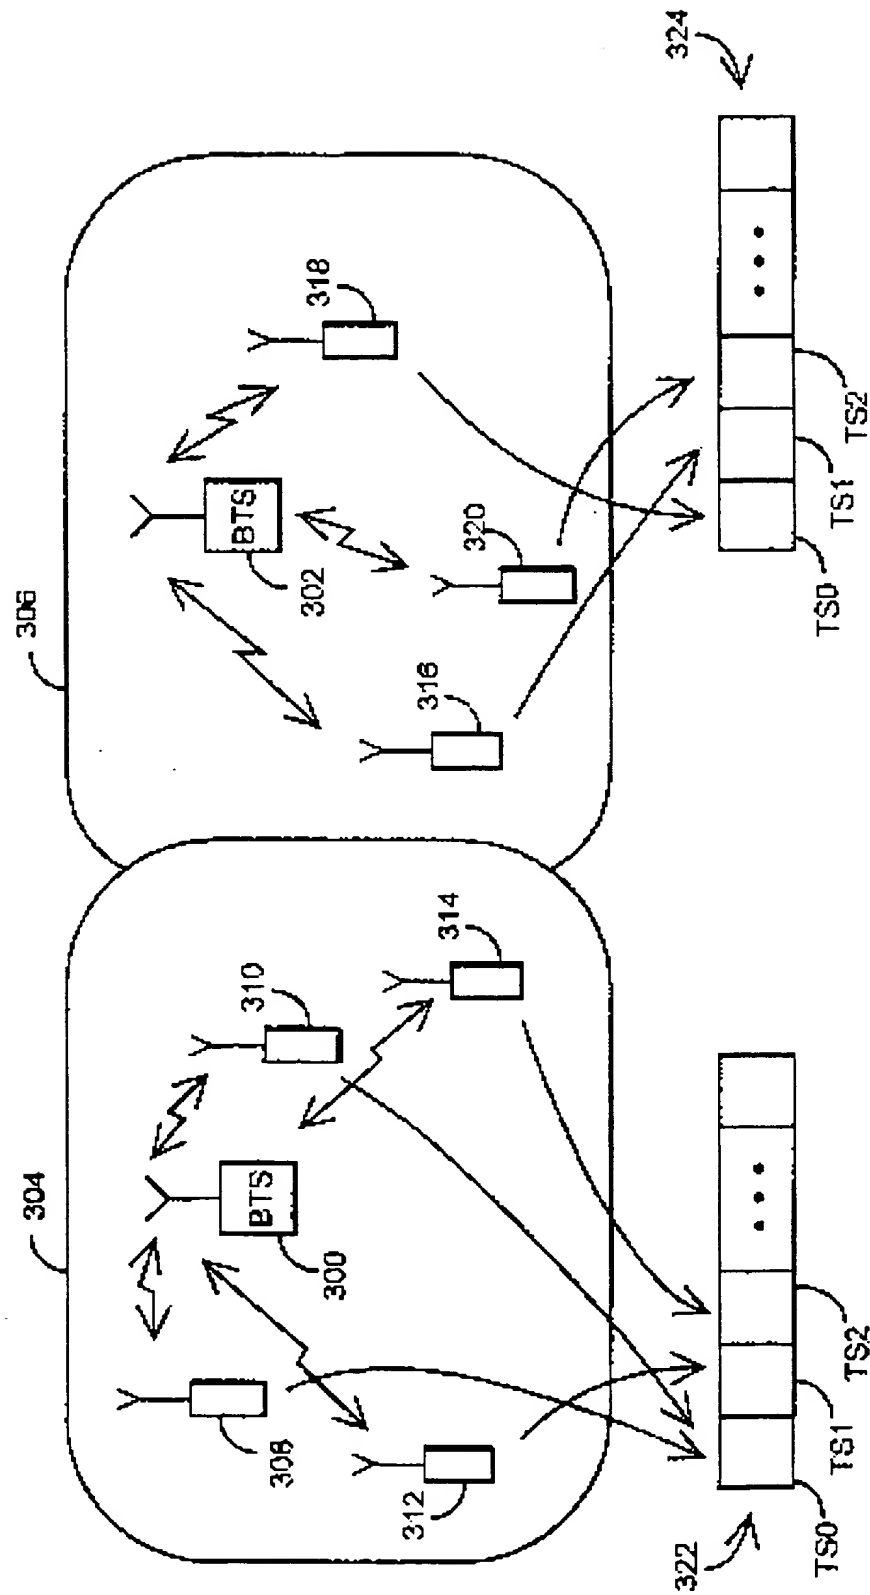


Fig. 3

PCT


WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>H04Q 7/38</b>	<b>A3</b>	(11) International Publication Number: <b>WO 98/17077</b> (43) International Publication Date: 23 April 1998 (23.04.98)
(21) International Application Number: PCT/FI97/00625 (22) International Filing Date: 14 October 1997 (14.10.97) (30) Priority Data: 964138 15 October 1996 (15.10.96) FI (71) Applicant (for all designated States except US): NOKIA TELECOMMUNICATIONS OY [FI/FI]; Keilalahdentie 4, FIN-02150 Espoo (FI). (72) Inventors; and (75) Inventors/Applicants (for US only): TOSKALA, Antti [FI/FI]; Itämerenkatu 8 A 2, FIN-00180 Helsinki (FI). HOLMA, Harri [FI/FI]; Itävuolenkuja 1 B 32, FIN-02100 Espoo (FI). PIRHONEN, Riku [FI/FI]; Gyldenintie 10 E 85, FIN-00200 Helsinki (FI). (74) Agent: PATENTTITOIMISTO TEKNOPOLIS KOLSTER OY; c/o Kolster Oy AB, Iso Roobertinkatu 23, P.O. Box 148, FIN-00121 Helsinki (FI).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).  <b>Published</b> <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i> <i>In English translation (filed in Finnish).</i>  (88) Date of publication of the international search report: 18 June 1998 (18.06.98)

(54) Title: CHANNEL ALLOCATION METHOD AND RADIO SYSTEM USING A COMBINATION OF TDMA AND CDMA

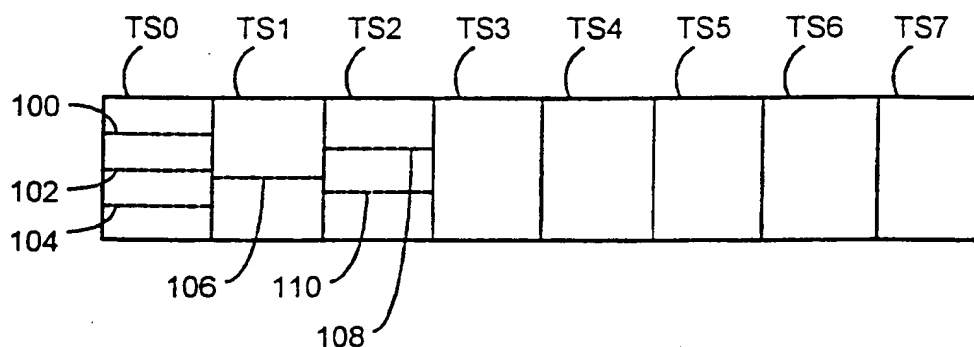

(57) Abstract

The invention relates to a radio system and a channel allocation method in a radio system comprising at least one base station (300) communicating with terminals (308 to 314) within its coverage area (304), and in which method air interface resources are allocated to different terminals with a combined time and code multiple access method in such a way that the signal of one or more terminals is transmitted in each time slot (TS0 to TS6). In order for air interface resources to be efficiently allocated to different connections, in the method of the invention terminal signals (308 to 314) are grouped into different time slots on the basis of the connection characteristics of each terminal.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

## INTERNATIONAL SEARCH REPORT

International application No.  
PCT/FI 97/00625

## A. CLASSIFICATION OF SUBJECT MATTER

IPC6: H04Q 7/38

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: H04Q, H04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	GB 2285900 A (MOTOROLA LIMITED), 26 July 1995 (26.07.95), abstract --	1-13
X	GB 2293947 A (KABUSHIKI KAISHA TOSHIBA), 10 April 1996 (10.04.96), abstract --	1-13
X	JP 6268575 A (FUJITSU LTD), 22 Sept 1994 (22.09.94), abstract -- -----	1-13

☐ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

## \* Special categories of cited documents:

- \* "A" document defining the general state of the art which is not considered to be of particular relevance
- \* "E" earlier document but published on or after the international filing date
- \* "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \* "O" document referring to an oral disclosure, use, exhibition or other means
- \* "P" document published prior to the international filing date but later than the priority date claimed

\* "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\* "X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\* "Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

\* "&" document member of the same patent family

Date of the actual completion of the international search

14 April 1998

Date of mailing of the international search report

21 -04- 1998

Name and mailing address of the ISA/  
Swedish Patent Office  
Box 5055, S-102 42 STOCKHOLM  
Facsimile No. +46 8 666 02 86

Authorized officer

Bengt Romedahl  
Telephone No. +46 8 782 25 00

**INTERNATIONAL SEARCH REPORT**  
Information on patent family members

International application No.  
PCT/FI 97/00625

Patent document cited in search report			Publication date	Patent family member(s)	Publication date
GB	2285900	A	26/07/95	NONE	
GB	2293947	A	10/04/96	GB 9524231 D CA 2164006 A CN 1126540 A JP 7284149 A WO 9527380 A	00/00/00 12/10/95 10/07/96 27/10/95 12/10/95
JP	6268575	A	22/09/94	NONE	

**ORIGINAL  
NO MARGINALIA**